


Drawer runner

Single extension




- Load bearing capacity: 25 kg/pair
- Material: Steel
- Finish: Plastic coated white, RAL 9010, white aluminium, similar to RAL 9006, black, RAL 9011 or brown, RAL 8017
- Guided by: 4 friction bearing mounted nylon rollers
- Height adjustment: Using elongated holes in the carcass rail
- Type of closing: Self closing
- Fitting to side panel: For screwing into 32 mm series drilled holes
- Fitting to drawer: Screw fixing, surface mounted

Installation




Application and planning dimensions

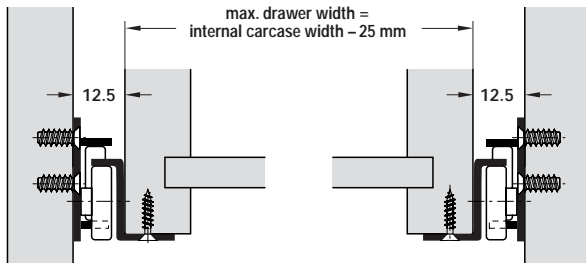


Drilling dimensions

Front edge of carcass

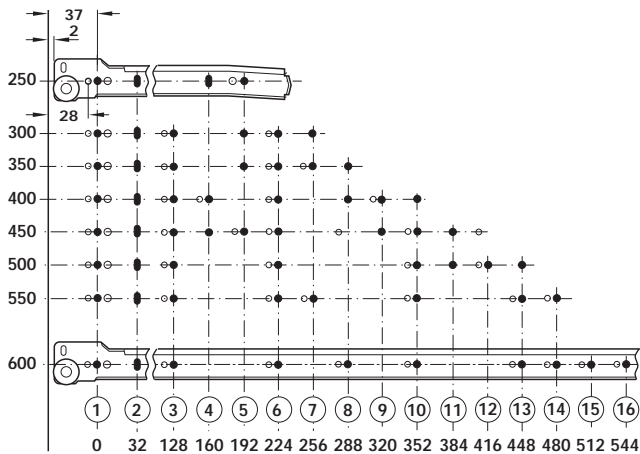

Load bearing capacity

Load bearing capacity under dynamic stress at a length of 600 mm and with screws in **all** fixing drillings. With longer rails the load bearing capacity is reduced by approx. 20 %.

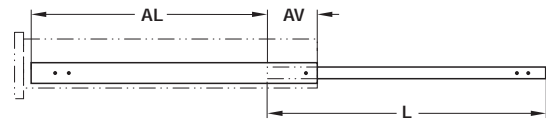

Nominal length L mm	Extension length AL mm	Extension loss AV mm
250	163	87
300	213	87
350	263	87
400	313	97
450	363	97
500	413	97
550	433	117
600	483	117

Commercial packaging Packed in pairs

Nominal length L mm	Packing Pairs	White, RAL 9010 Cat. No.	White aluminium, RAL 9006 Cat. No.	Black, RAL 9011 Cat. No.	Brown, RAL 8017 Cat. No.
250	20	423.08.726	423.08.226	423.08.326	423.08.126
300	20	423.08.731	423.08.231	423.08.331	423.08.131
350	20	423.08.736	423.08.236	423.08.336	423.08.136
400	20	423.08.741	423.08.241	423.08.341	423.08.141
450	20	423.08.746	423.08.246	423.08.346	423.08.146
500	10	423.08.751	423.08.251	423.08.351	423.08.151
550	10	423.08.756	423.08.256	423.08.356	423.08.156
600	10	423.08.761	423.08.261	423.08.361	423.08.161

Industrial packaging Single parts separately packed in boxes

Nominal length L mm	Packing Pairs	White, RAL 9010 Cat. No.	White aluminium, RAL 9006 Cat. No.
250	100	423.08.727	423.08.227
300	100	423.08.732	423.08.232
350	100	423.08.737	423.08.237
400	50	423.08.742	423.08.242
450	50	423.08.747	423.08.247
500	50	423.08.752	423.08.252
550	50	423.08.757	423.08.257
600	50	423.08.762	423.08.262

Chipboard screws with countersunk head Ø 3.5 mm for drawer rail ▶ Page 13.22

VARIANTA Special screws with countersunk head Ø 5.0 mm for carcass rail ▶ Page 13.37

Dimensional data not binding. We reserve the right to alter specifications without notice.